

CSG-PV
(605W-630W)

Technology Parameters

Electricity Parameters at STC


Cell	Topcon cell182×91mm 156pcs(6×13×2)—16bb					
Max power(W)	605	610	615	620	625	630
Power Tolerance	0 ~ +6W					
Voltage at Pmax (Vmp)	45.42	45.6	45.77	45.93	46.10	
Current at Pmax (Imp)	13.33	13.38	13.44	13.5	13.56	
Open circuit voltage (Voc)	55.17	55.31	55.44	55.58	55.72	
Short circuit current (Isc)	14.03	14.11	14.19	14.27	14.35	
Max system voltage (VDC)	1500					
Module efficiency (%)	21.64	21.82	22.0	22.18	22.36	
Number of bypass diodes	3					
Max series fuse(A)	25A					
Temp coefficient of Pmax	-0.350%/°C					
Temp coefficient of Pmax	-0.284%/°C					
Temp coefficient of Isc	0.050%/°C					
Operating temp of Cell.	45±2 °C					

Mechanical data

Cable type	Φ=4mm2, L=300±5mm (length can be customized)
Connector	Compatible with MC4 plug
Size A×B×C	2465×1134×30mm
Weight	34kg
Drain holes(pcs)	8
Structure	Double glass: tempered glass, thickness 2.0mm+2.0mm Encapsulation film: EVA/POE
Junction box	IP68
Frame	Anodized aluminum alloy
Qualification test parameters	
Dielectric insulation voltage	Max 6000VDC
Operating temp	-40°C ~ +85°C
Max static load	5400Pa
Hail stone impact	Diameter 25mm, speed 23m/s
Fire rating	Class A


STC: 1000W/m², 1.5AM, Cell Temperature 25 °C

Product Drawing (Unit:mm)

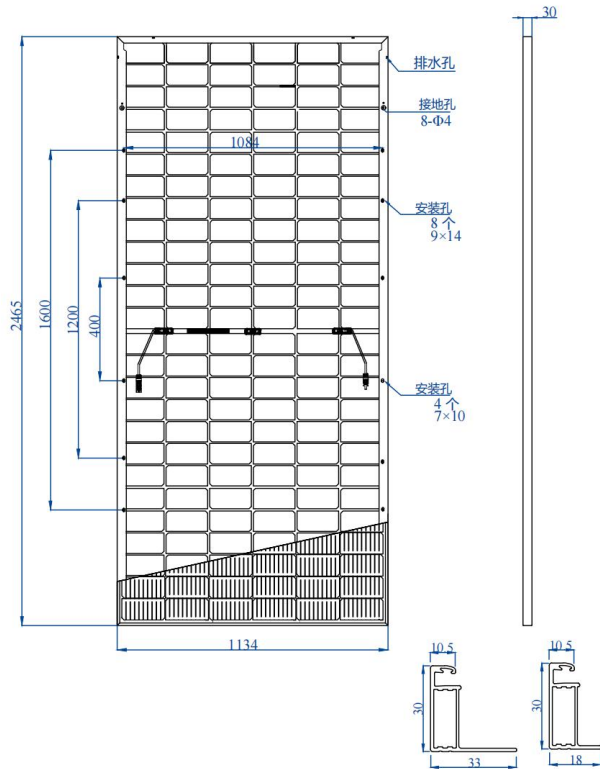

I-V - CSG-615W

Current-voltage curves for CSG 615W PV module under varying light intensities

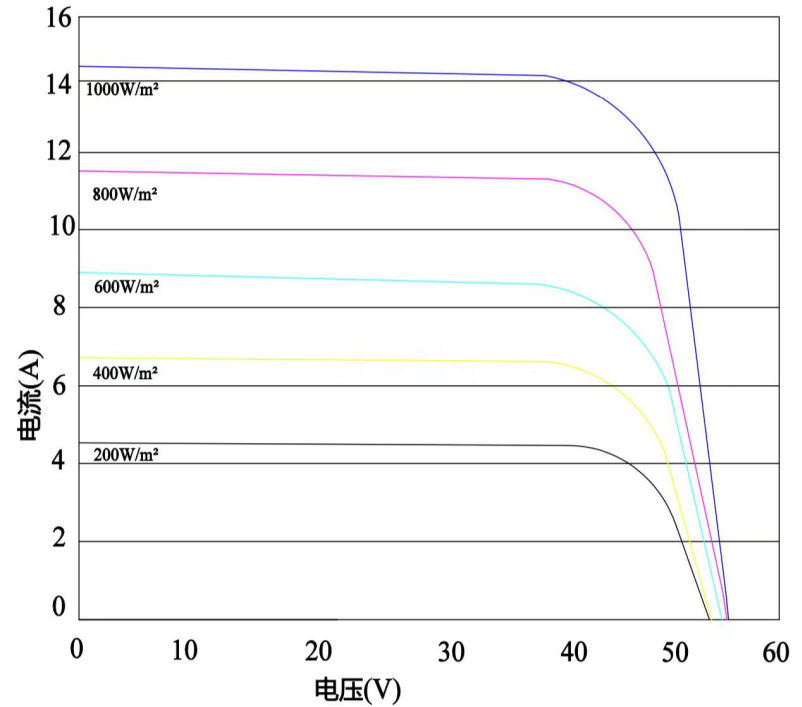

DOWNLOAD

